



Datenblatt - Fiche technique - Data sheet



11.99.5604



VALUE DisplayPort Kabel, DP ST - ST, 7,5 m

VALUE Câble DisplayPort, DP M - DP M, 7,5 m

VALUE DisplayPort Cable, DP-DP, M/M, 7.5 m

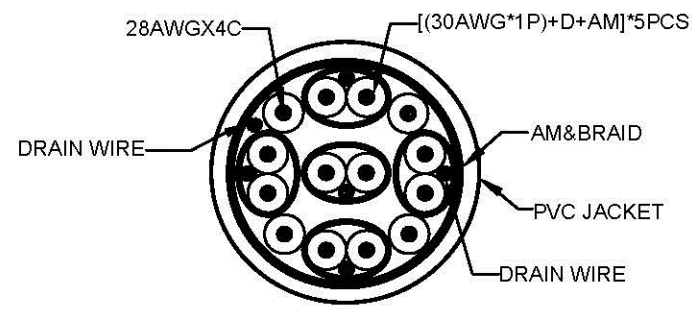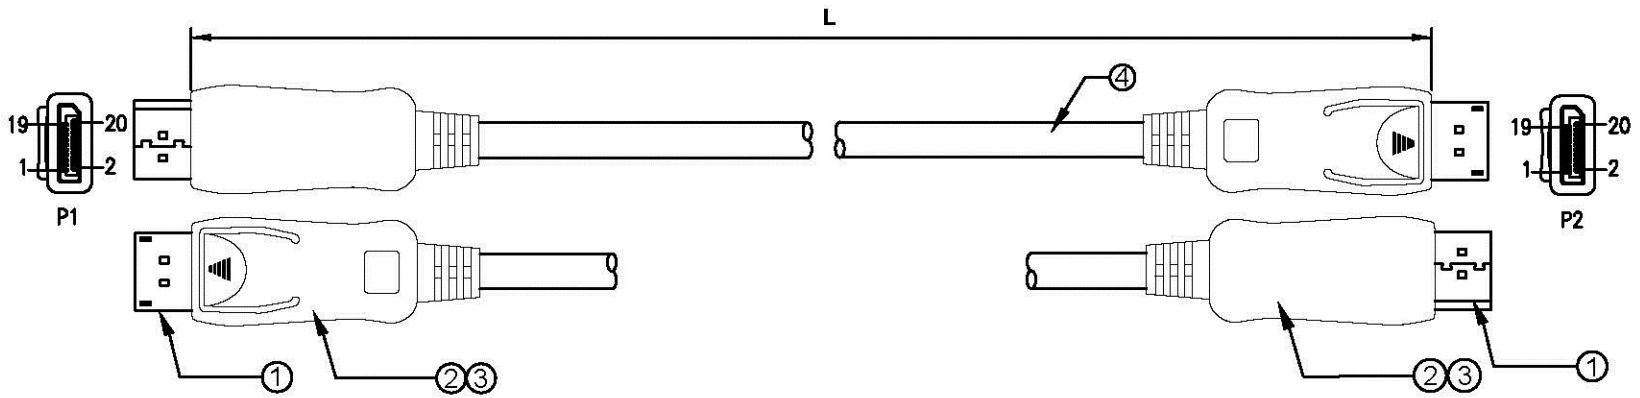

PIN OUT

P1	P2
1	12
3	10
2	11
4	9
6	7
5	8
7	6
9	4
8	5
10	3
12	1
11	2
13	13
14	14
15	15
17	17
16	16
18	18
19	19

SHELL BRAID SHELL

NOTE:

- 1.Electrical properties:**
 - 1.ALL COMPONENTS ARE RoHS COMPLIANT.
 - 2.100% OPEN AND SHORT TEST.
 - 3.CONDUCTOR RESISTANCE:3 OHMS
 - 4.INSULATION RESISTANCE:10 MEGOHMS.
 - 5.HI-POT:DC200V/0.01S
 - 6.PC TEST 4K*2K 30Hz PASS 1080P PASS

2. ROHS 2.0 and REACH

MODEL LIST

Model	Length
11.99.5604	7500mm
11.99.5609	10000mm

MATERIAL LIST

		SECOMP					
④	CABLE	(7/0.10BC*1P+7/0.10BC+ AM)* 5PCS+7/0.12BC*4C+AM+7/0.12BC+128/0.12 AL-MG+PVC, OD: 7.3±0.1mm, COLOR: BLACK	L	DRAW No.	NAME	DP CABLE 4K*2K/ 30 Hz	
③	OUTER MOLD	BLACK ABS	2	CUSTOMER		MAPE	
②	INNER MOLD	LD-PE	2	MODEL No.	11.99.560X-7.5~10M	TOLERANCE	
①	CONNECTOR	DisplayPort MALE , GOLD PLATED PIN, Nickel PLATED SHELL	2	APPROVE BY	CHECK BY	DRAW BY	
No.	PART NAME	DESCRIPTION	QTY			SCALE	MM
						PAGE	1/1